查询B59880C0080A070供应商

Applications

- Limit temperature sensor

Features

- Sensor with epoxy resin coating
- Tinned leads
- Metal tag for easy mounting
- Characteristics for nominal threshold temperatures of 90 to 160 °C conform with DIN 44081
- Metal tag permits good thermal coupling and thus short response time

Delivery mode

- Cardboard strips in cardboard box

Dimensional drawing



Dimensions (mm)

General technical data

Max. operating voltage	(T_A = 0 … 40 °C)	V_{max}	30	VDC
Max. measuring voltage	(T_A – 25 K … T_{NTT} + 23 K)	$V_{meas,max}$	7,5	VDC
Rated resistance	($V_{PTC} \leq$ 2,5 V)	R_N	≤ 100	Ω
Thermal threshold time		t_a	< 20	s
Operating temperature range	($V \leq V_{meas,\ max}$)	T_{op}	– 40/T_{NTT} + 23	°C
	($V = V_{max}$)	T_{op}	0/+ 40	°C

Electrical specifications and ordering codes

T_{NTT} $\pm \Delta T$ °C	R[1] ($T_{NTT} - \Delta T$) Ω	R[1] ($T_{NTT} + \Delta T$) Ω	R[2] (T_{NTT} + 15 K) Ω	R[1] (T_{NTT} + 23 K) Ω	Stamp code	Ordering code
60 ± 5	≤ 570	≥ 570	—	≥ 10 k	331	B59901D0060A040
70 ± 5	≤ 570	≥ 570	—	≥ 10 k	341	B59901D0070A040
80 ± 5	≤ 570	≥ 570	—	≥ 10 k	351	B59901D0080A040
90 ± 5	≤ 550	≥ 1330	≥ 4 k	—	361	B59901D0090A040
100 ± 5	≤ 550	≥ 1330	≥ 4 k	—	371	B59901D0100A040
110 ± 5	≤ 550	≥ 1330	≥ 4 k	—	381	B59901D0110A040
120 ± 5	≤ 550	≥ 1330	≥ 4 k	—	391	B59901D0120A040
130 ± 5	≤ 550	≥ 1330	≥ 4 k	—	401	B59901D0130A040
140 ± 5	≤ 550	≥ 1330	≥ 4 k	—	411	B59901D0140A040

1) $V_{PTC} \leq 2{,}5$ V
2) $V_{PTC} \leq 7{,}5$ V

Characteristics (typical)

PTC resistance R_{PTC} versus PTC temperature T_{PTC}
(measured at low signal voltage)

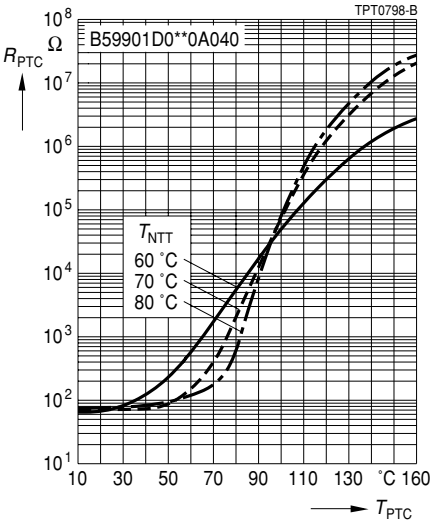

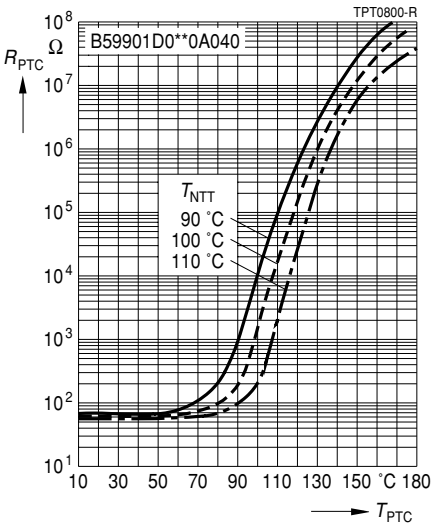

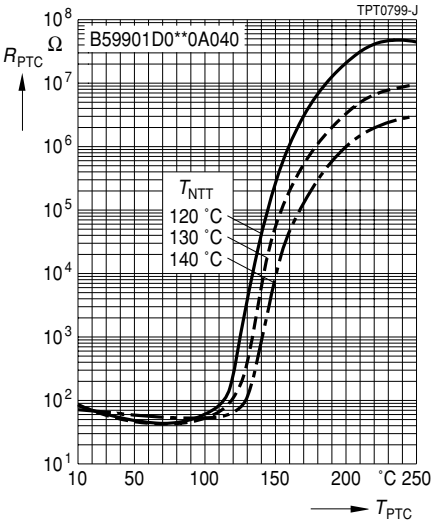

Published by EPCOS AG
Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY
☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the informa
EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of
Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association),

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or
tives.

Due to technical requirements components may contain dangerous substances. For information o
also contact one of our Sales Offices.

中发网 WWW.ZFA.CN
全球最大的PDF中文下载站

PDF 资料下载尽在中发网

版权所有 中发飞询 京ICP证041662号 Copyright © 2004-2005 www.zfa.cn All Rights Reserved
客服热线：深圳 0755-83278916，83278919 北京 010-62632888，62636888